

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес: esu@nt-rt.ru | <http://epluse.nt-rt.ru>

HCT01


Humidity / Temperature Sensor

HCT01 humidity/temperature sensors combine high quality, long time approved thin-film sensor technology simple processability and the possibility of a cost-efficient integration into customer application.

The pre-adjusted capacitive E+E humidity sensorelement saves complicated and time-consuming humidity adjustment. Highly accurate thin-film elements are used for the temperature measurement – a must for precise dew point determination.

The DFN packaging guarantees maximum mechanical sensor protection and enables reflow soldering. A protective film on the surface of the humidity sensor ensures extensive protection against contamination like dust, salt or chemical deposit.


Depending on the individual application, accuracy requirements and existing interface electronics, different cost-saving evaluation circuitries are available. Do not hesitate to contact our specialists for further information and design-in support.



Features

- RH and T sensor in one package**
- RH adjusted**
- mature humidity sensor technology**
- high temperature accuracy**
- reflow solderable**
- integrated dust filter**
- standardized DFN package**


Basic Design

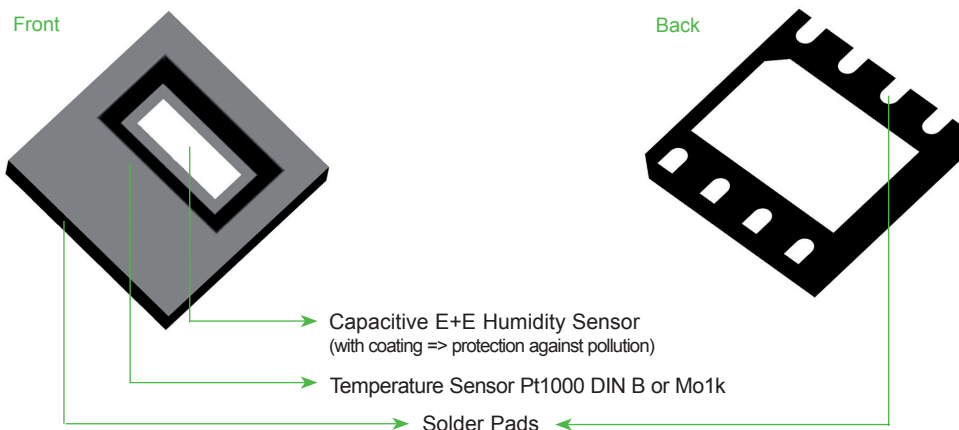

Technical Data

Humidity Element

Working range	humidity:	0...100% RH
	temperature:	-40...140°C (-40...284°F)
Nominal capacitance	C ₀	70 pF
Accuracy RH at 30°C	HCT01-00:	non adjusted (C ₀ : 70±7 pF)
	HCT01-02:	±2% RH (30...70% RH) ±3% RH (0...90% RH)
	HCT01-03:	±3% RH (30...70% RH) ±4.5% RH (0...90% RH)

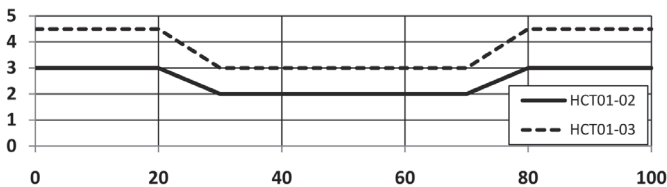

Sensitivity	0.25 pF / % RH
Temperature dependence ¹⁾	dC = -0,00083 * RH(T-30°C) [pF]
Hysteresis	< 1.85%
Maximum supply voltage (no DC voltage)	5V max (U _{pp})
Maximum DC voltage	< 0.3V
Parallel Resistance	R _p ≥ 100 MΩ
Serial Resistance	R _s ≤ 1200 Ω
Respons time	t ₆₃ ≤ 6s
Material housing	plated Cu lead-frame and green epoxy-based compound fully RoHS and WEEE compliant
Lead finish	NiPdAu
Sensor protection	E+E coating
Storage temperature	-40...55°C (-40...131°F)
Dimensions	5x5x0.95 mm
Packaging	tape and reel

Temperature Element

	Mo1k	Pt1000
Nominal resistance (at 25°C / 77°F)	R ₂₅ = 1000 Ohm	R ₀ = 1000 Ohm
Accuracy	dt = ±[0.2+0.008 * (t-25)] K	DINB
Respons time	t ₆₃ ≤ 6s	
Characteristics	R = R ₀ * (1+A*t+B*t²) R ₀ = 928.73 Ohm A = 0.0030659 B = 3.41*10 ⁻⁷	acc. EN60751
Maximum continuous current (t _{LL} < t _A < t _{UL})	0,1mA (I _{cont})	
Maximum current	1mA (I _{max})	
Self heating	0,35 K/mW	


1) detailed calculation on request

Working Range

The working range is shown with regard to the humidity / temperature limits.

Although the sensors would not fail beyond the limits, the specification is guaranteed only within the working range.

In applications with high humidity at high temperatures the time factor shall be considered.

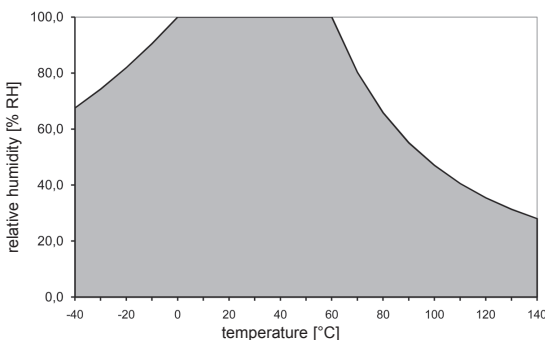

Characteristic Humidity Element


The average increase of capacitance over the working range is app. 25 pF. For the range of 0–98% RH linear approximation is possible, errors will be lower than $\pm 1.5\%$ RH.

The sensor characteristic is determined by the following linear formula:

$$C(U_w) = C_0 \cdot [1 + HC_0 \cdot U_w]$$

with $HC_0 = 3420 \pm 191 \text{ ppm /\% RH}$

$$C_0 = 70 \text{ pF}$$

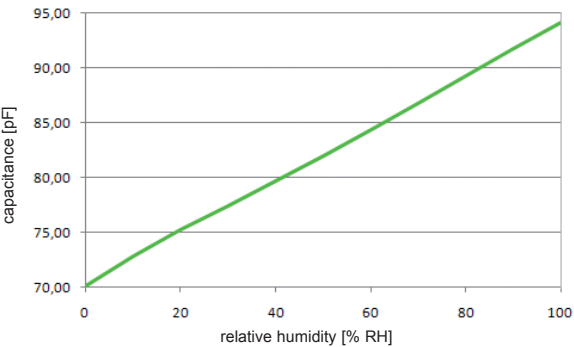

For high accuracy requirements, the sensitivity is determined by the following polynomial:

$$C(U_w) = C_0 \cdot [1 + HC_0 \cdot U_w + k(U_w)]$$


whereby:

$$k(U_w) = A_1 \cdot U_w + A_2 \cdot U_w^{1.5} + A_3 \cdot U_w^2 + A_4 \cdot U_w^{2.5}$$

$A_1 = 2.6657E^{-3}$ $A_2 = -9.6134E^{-4}$ $A_3 = 1.1272E^{-4}$ $A_4 = -4.3E^{-6}$

Connection Diagram

Top View:




1	H1	Humidity +
2	NC	not connected
3	NC	not connected
4	H2	Humidity -
5	T1	Temperature
6	T1	Temperature
7	T2	Temperature
8	T2	Temperature


Dimensions in mm

DFN-8 package

Top View:

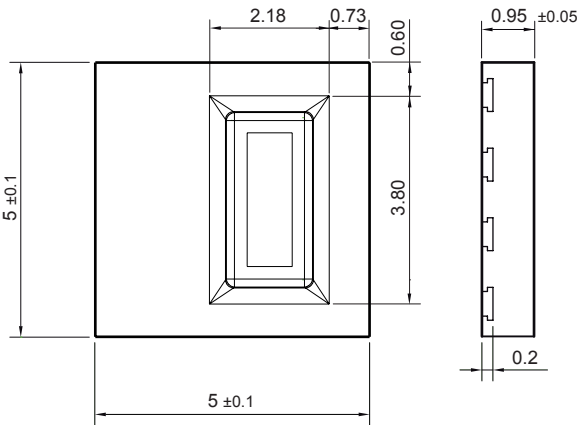

Bottom View:

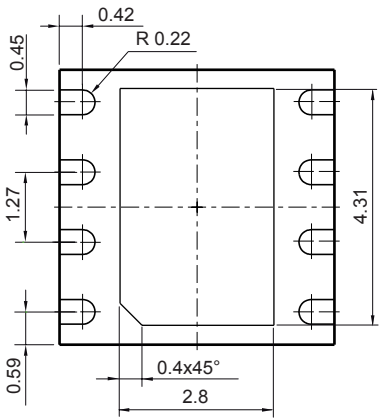

Possible circuitries using HCT01

Depending on accuracy requirements and existing electronics, various cost-effective evaluation circuits are available – our specialists can provide expert advice for your specific application.

Ordering Guide

TYPE	ACCURACY RH	TEMPERATURE ELEMENT	PACKAGING
HCT01 (HCT01)	non adjusted (00) ±2% (02) ±3% (03)	no temperature element (no code) Pt1000 DINB (D) Mo1k (S)	1000 sensors per reel (TR1) 2500 sensors per reel (TR2,5)

Order Example

HCT01-02STR1

Type: HCT01
Accuracy RH: ±2%
Temp. Element: Mo1k
Packaging: 1000 sensors per reel

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Иваново (4932)77-34-06	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Ижевск (3412)26-03-58	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93

Единый адрес: esu@nt-rt.ru | <http://epluse.nt-rt.ru>